




# dati tecnici stendy

Ref.	A	B	C	White & Colors			Chrome		Peso	Cap.	Resistenze Raccomandate Recommended Resistances Résistances Conseillés Resistencias Recomendadas	
				$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$		$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$				300W
	mm	mm	mm	W	W		W	W	kg	Lt		
<b>090</b> 18 tubi pipes tubes tubos	SY089050	889	512	471	390 407	230 240	MIN. (pannelli chiusi) MAX. (pannelli aperti)	282 294	162 169	10,1	5	● x
	SY089060	889	612	571	472 492	279 291	MIN. (pannelli chiusi) MAX. (pannelli aperti)	341 356	196 204	11,6	5,7	● x
<b>130</b> 24 tubi pipes tubes tubos	SY132050	1318	512	471	572 712	311 387	MIN. (pannelli chiusi) MAX. (pannelli aperti)	409 520	215 273	14,2	7,1	● x
	SY132060	1318	612	571	692 862	377 469	MIN. (pannelli chiusi) MAX. (pannelli aperti)	495 629	260 331	16,3	8,1	x ●
<b>175</b> 33 tubi pipes tubes tubos	SY175050	1747	512	471	725 963	370 492	MIN. (pannelli chiusi) MAX. (pannelli aperti)	524 703	257 345	18,5	9,4	x ●
	SY175060	1747	612	571	877 1165	448 595	MIN. (pannelli chiusi) MAX. (pannelli aperti)	634 851	311 418	21,2	10,7	x ●


kcal/h = 0,86 x Watt

● White & Color  
x Chrome

Sistemi di fissaggio a parete  
Wall fastening systems  
Systèmes d'installation murale  
Sistemas de fijación a la pared




Dimensioni corpo scaldante  
Radiator body dimensions  
Dimensions du corps chauffant  
Dimensiones del cuerpo calefactor



Installazione versione mista con "T"

Installation with heating element and "T"  
Installation avec résistance électrique et "T"  
Instalación con resistencia eléctrica y "T"




Raccordo a "T"  
"T" fitting  
Raccord en "T"  
Conexión en "T"

Resistenza con termostato  
Resistance with thermostat  
Résistance avec thermostat  
Resistencia con termostato

Variazione interasse con raccordo a "T"  
Modification of interaxis with "T" fitting  
Variation interaxe avec raccord "T"  
Variación entreje con rácor en "T"

Misure in mm: A=altezza B=larghezza C=interasse  
Measures in mm: A=height B=width C=interaxis  
Mesures in mm: A=hauteur B=largeur C=entraxe  
Medidas in mm: A=altura B=ancho C=entre eje

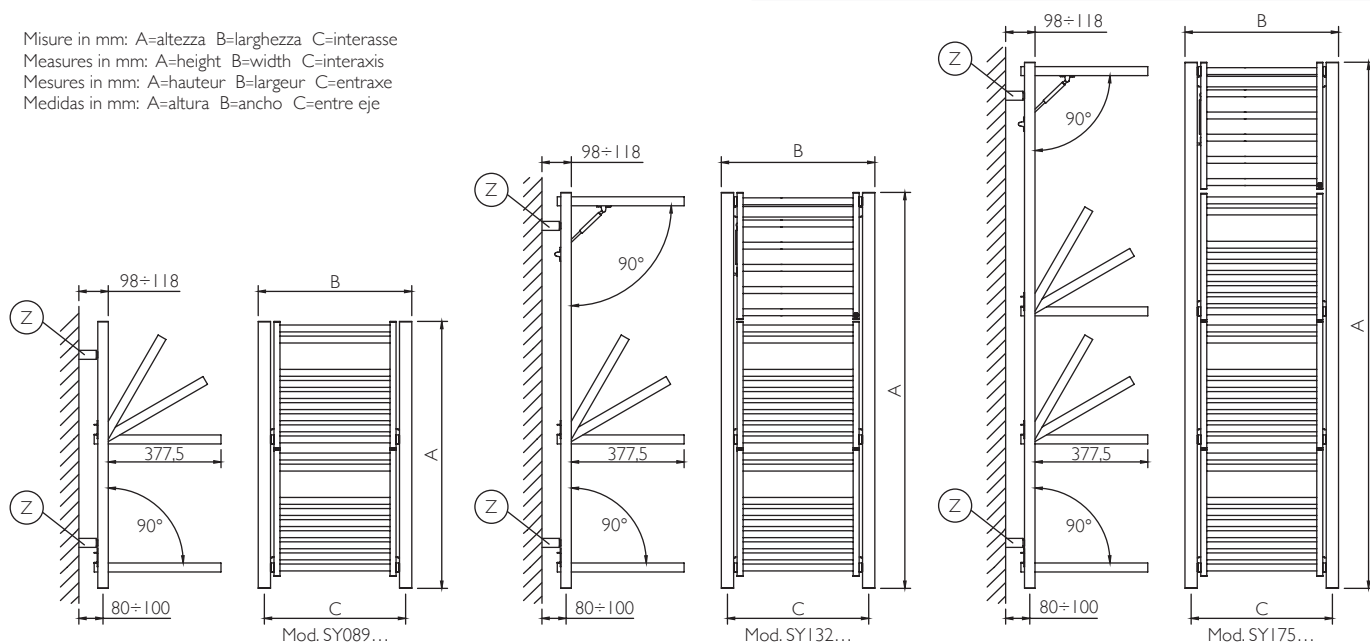

## note tecniche

Temperatura max di esercizio: 90 °C  
Maximum operating temperature: 90 °C  
Température maximum de fonctionnement: 90 °C  
Temperatura máx de funcionamiento: 90 °C

Non disponibile per impianto monotubo  
Not available for single-pipe system  
Non disponible pour installation mono-tube  
No está disponible para instalación monotubo

Consultare note tecniche di dettaglio Pag.149  
Please consult technical notes on Page 151  
Consulter renseignements techniques détaillés à la Pag.153  
Consulte las informaciones técnicas detalladas Pag.155

Pressione max di esercizio: 500 kPa  
Maximum operating pressure: 500 kPa  
Pression maximum de fonctionnement: 500 kPa  
Presión máx de funcionamiento: 500 kPa

I sistemi di fissaggio sono bianchi per la versione "9010", cromati per versioni "chrome" & "colors"  
Wall fastening systems are white for "9010" version, chromed for "chrome" & "colors" versions  
Les systèmes d'installation sont blancs pour la version "9010", chromés pour les versions "chrome" & "colors"  
Los sistemas de fijación son blancos para la versión "9010", cromados para las versiones "chrome" & "colors"

