



dati tecnici boxes

Ref.	A	B	C	White & Colors		Peso	Cap.
				$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$		
				W	W		
BX170050	1700	550	450	587	318	55,0	8,3

1700
3 vani
shelves
étagères
estantería


$$\text{kcal/h} = 0,86 \times \text{Watt}$$

Sistemi di fissaggio a parete

Wall fastening systems

Systèmes d'installation murale

Sistemas de fijación a la pared




Dimensioni corpo scaldante

Radiator body dimensions

Dimensions du corps chauffant

Dimensiones del cuerpo calefactor




Misure in mm: A=altezza B=larghezza C=interasse

Measures in mm: A=height B=width C=interaxis

Mesures in mm: A=hauteur B=largeur C=entraxe

Medidas in mm: A=altura B=ancho C=entre eje

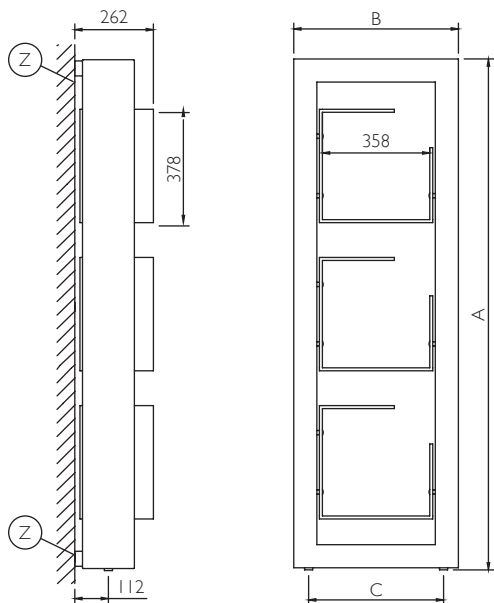

note tecniche

Temperatura max di esercizio: 90 °C

Maximum operating temperature: 90 °C

Température maximum de fonctionnement: 90 °C

Temperatura máx de funcionamiento: 90 °C

Non disponibile per impianto monotubo

Not available for single-pipe system

Non disponible pour installation mono-tube

No está disponible para instalación monotubo

Pressione max di esercizio: 400 kPa

Maximum operating pressure: 400 kPa

Pression maximum de fonctionnement: 400 kPa

Presión máx de funcionamiento: 400 kPa

Consultare note tecniche di dettaglio Pag.149

Please consult technical notes on Page 151

Consulter renseignements techniques détaillés à la Pag.153

Consulte las informaciones técnicas detalladas Pag.155

