
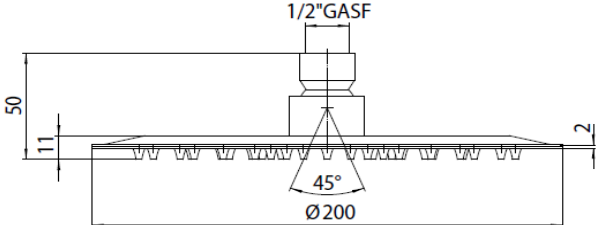
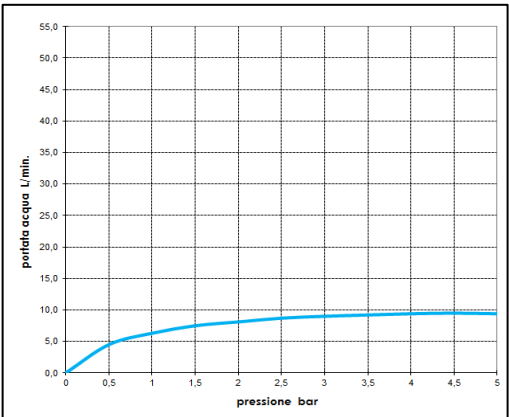


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 10/04/2017	Rev/0																										
Codice / Code: INI004		Descrizione / description: Soffione Twiggly autopulente Ø 200 mm con snodo 1/2" F Twiggly shower head Ø 200 mm with 1/2" F swivel ball – Easy-Clean																													
Foto / image		Disegni / drawings																													
																															
Grafico di portata / Flow rate diagram																															
<table border="1"> <thead> <tr> <th></th> <th>PIOGGIA</th> </tr> </thead> <tbody> <tr><td>0</td><td>0,0</td></tr> <tr><td>0,5</td><td>4,5</td></tr> <tr><td>1</td><td>6,3</td></tr> <tr><td>1,5</td><td>7,5</td></tr> <tr><td>2</td><td>8,1</td></tr> <tr><td>2,5</td><td>8,7</td></tr> <tr><td>3</td><td>9,0</td></tr> <tr><td>3,5</td><td>9,2</td></tr> <tr><td>4</td><td>9,4</td></tr> <tr><td>4,5</td><td>9,5</td></tr> <tr><td>5</td><td>9,4</td></tr> <tr><td>pressione bar</td><td>portata L/min</td></tr> </tbody> </table>			PIOGGIA	0	0,0	0,5	4,5	1	6,3	1,5	7,5	2	8,1	2,5	8,7	3	9,0	3,5	9,2	4	9,4	4,5	9,5	5	9,4	pressione bar	portata L/min	<p style="color: red; text-align: center;">Portata minima consigliata per un buon funzionamento</p> <p style="color: red; text-align: center;">Min flow rate: 9 L/MIN</p>			
	PIOGGIA																														
0	0,0																														
0,5	4,5																														
1	6,3																														
1,5	7,5																														
2	8,1																														
2,5	8,7																														
3	9,0																														
3,5	9,2																														
4	9,4																														
4,5	9,5																														
5	9,4																														
pressione bar	portata L/min																														
MATERIALI / materials																															
Stainless steel, rubber.																															
CARATTERISTICHE IDRAULICHE / hydraulic features																															
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																											
min	1 bar	--	--	Blocco di sicurezza safety lock	/																										
max	5 bar	--	<70°C	Temperatura acqua fredda cold water temperature	/																										
consigliata recommended	2-3 bar	9 L/min	<42°C	Temperatura acqua calda hot water temperature	/																										
CERTIFICAZIONI / CERTIFICATIONS:																															
CONFORMITA' / CONFORMITY : EN 1112; Chrome plating - EN 248.																															